



X-TREME SLED PRO

www.papatya.com.tr

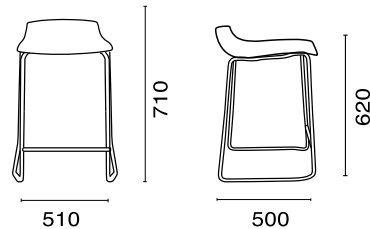

PP FINISH



Frame Features (Ø 17 mm - 2 mm thickness)

101 White powder coated	
102 Black powder coated	
103 Anthracite powder coated	
104 Taupe powder coated	
110 Dark yellow powder coated	
111 Brick red powder coated	
112 Reseda Green powder coated	
117 Wenge powder coated	
118 Warm Grey powder coated	
123 Aqua Blue powder coated	

Net weight

Gross weight

Max.Stacking

Packaging

Shipment Details

(kg)
5.00

(kg)
5.80



4
550x650x1000mm / m³ 0.36



20' : 296 pcs.
40' : 600 pcs.
40HC : 792 pcs.
80cbm : 928 pcs.

Description

A new member of X-Treme range ! Natural, warm, contemporary. The organic softness of the glassfibre polypropylene shell in mat colours offers a new way of looking and feeling. It's a pleasant range where you can relax in perfect harmony. Available in all version of the frames from X-Treme Collection. Anti UV stabilized. Designed with public spaces in mind and suitable both for home and contract usages.

Auxiliary Materials

4 pcs. gliders in polyurethane - 2 pcs. star supporting part - 1 pcs. star supporting drop label - 4 pcs (M6x28) montage bolt - 4 pcs. montage gasket - 4 pcs. montage anchor - 4 pcs.(M6) montage flake.

Cleaning & Maintenance

Should be cleaned with detergent and a soft damp cloth. Should not be cleaned with abrasive chemicals.
No periodic maintenance required.

Product Quality Certificate



TSE 581-1 / 581-2 / 581-3



ISO 9001
Quality Management System



ISO 45001
Occupational Health and Safety
Management System



ISO 14001
Environmental
Management System